

VG1000 Series Flanged Ball Valves

Description


VG1000 Series Flanged Ball Valves are designed primarily to regulate the flow of hot water, chilled water, and 50% glycol solutions to the demand of a controller in Heating, Ventilating, and Air Conditioning (HVAC) systems. The valves come in sizes of 2-1/2, 3, and 4 in. (DN65, DN80, and DN100). These American Society of Mechanical Engineers (ASME) Class 150 flanged valves come in both two- and three-way configurations. Johnson Controls offers valve, linkage, and actuator assemblies for factory or field mounting with either spring return or non-spring return actuators.

If the VG1000 Series Flanged Ball Valve fails to operate within its specifications, refer to the *VG1000 Series Flanged Ball Valves Product Bulletin (LIT-12011228)* for a list of repair parts available.

Features

- Closeoff Pressure Rating: 100 psi for Two-Way Valves; 50 psi for Three-Way Valves — provides tight shutoff.
- 300 Stainless Steel Ball and Stem Assembly — applies to systems with high temperature water (0 to 284°F [-18 to 140°C]) or 25 psi saturated steam.
- 500:1 Rangeability — provides accurate control under all load conditions.

- Amodel® Flow Characterizing Disk — provides equal percentage flow characteristics for best temperature control; available in a wide array of Cv ranges to cover a broad variety of applications.
- Ethylene Propylene Diene Monomer (EPDM) Double O-Ring Stem Seal — offers tested leak-free operation for 200,000 cycles in iron-oxide contaminated water.
- Graphite-Reinforced Polytetrafluoroethylene (PTFE) Seats — include 15% graphite-reinforced ball seats that last twice as long in iron-oxide contaminated water when compared to virgin Teflon® ball seats.
- PTFE Thermal Spacer — provides thermal isolation between the actuator and the valve.
- Seats Backed with EPDM O-Rings — maintain a constant seating force that compensates for expansion, contraction, and seat wear without increasing operating torque.
- Maintenance-Free Design — performs without failure in excess of 200,000 full stroke cycles in iron-oxide contaminated water.
- Available with Factory-Mounted M9124 or M9220 Series Electric Actuators — reduces field installation time and cost.

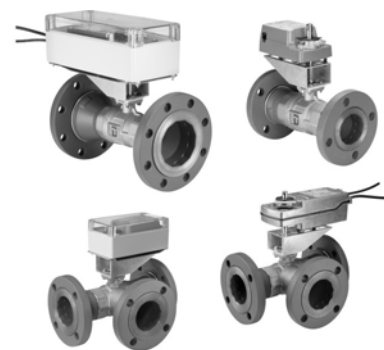

VG1000 Series Ball Valves Shown with Field Mounted M9000 Series Actuators

- M9000-330 and M9000-340 Weathershields Available for Field Installation — protect the actuator from corrosion, rain, freezing rain, sleet, and snow.

Repair Information

If the VG1000 Series Flanged Ball Valve fails to operate within its specifications, replace the unit. For a replacement valve, contact the nearest Johnson Controls® representative.

Selection Charts

Flanged Stainless Steel Trim Ball Valves with Non-Spring Return Electric Actuators

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			
				Without Switches		With Two Auxiliary Switches	
				On/Off (Floating)	DC 0 to 10 V Prop.	On/Off (Floating)	DC 0 to 10 V Prop.
				M9124-AGA-2	M9124-GGA-2	M9124-AGC-2	M9124-GGC-2
Two-Way – Non-Spring Return							
VG12A5GS	2-1/2	47	100	VG12A5GS+924AGA	VG12A5GS+924GGA	VG12A5GS+924AGC	VG12A5GS+924GGC
VG12A5GT		74		VG12A5GT+924AGA	VG12A5GT+924GGA	VG12A5GT+924AGC	VG12A5GT+924GGC
VG12A5GU		117		VG12A5GU+924AGA	VG12A5GU+924GGA	VG12A5GU+924AGC	VG12A5GU+924GGC
VG12A5HT	3	74	100	VG12A5HT+924AGA	VG12A5HT+924GGA	VG12A5HT+924AGC	VG12A5HT+924GGC
VG12A5HU		117		VG12A5HU+924AGA	VG12A5HU+924GGA	VG12A5HU+924AGC	VG12A5HU+924GGC
VG12A5HV		176		VG12A5HV+924AGA	VG12A5HV+924GGA	VG12A5HV+924AGC	VG12A5HV+924GGC
VG12A5HW		211		VG12A5HW+924AGA	VG12A5HW+924GGA	VG12A5HW+924AGC	VG12A5HW+924GGC
VG12A5JU	4	117	100	VG12A5JU+924AGA	VG12A5JU+924GGA	VG12A5JU+924AGC	VG12A5JU+924GGC
VG12A5JV		176		VG12A5JV+924AGA	VG12A5JV+924GGA	VG12A5JV+924AGC	VG12A5JV+924GGC
Three-Way – Non-Spring Return							
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+924AGA	VG18A5GS+924GGA	VG18A5GS+924AGC	VG18A5GS+924GGC
VG18A5GT		74 / 47		VG18A5GT+924AGA	VG18A5GT+924GGA	VG18A5GT+924AGC	VG18A5GT+924GGC
VG18A5GU		117 / 74		VG18A5GU+924AGA	VG18A5GU+924GGA	VG18A5GU+924AGC	VG18A5GU+924GGC
VG18A5HT	3	74 / 47	50	VG18A5HT+924AGA	VG18A5HT+924GGA	VG18A5HT+924AGC	VG18A5HT+924GGC
VG18A5HU		117 / 74		VG18A5HU+924AGA	VG18A5HU+924GGA	VG18A5HU+924AGC	VG18A5HU+924GGC
VG18A5HV		176 / 88		VG18A5HV+924AGA	VG18A5HV+924GGA	VG18A5HV+924AGC	VG18A5HV+924GGC
VG18A5HW		211 / 105		VG18A5HW+924AGA	VG18A5HW+924GGA	VG18A5HW+924AGC	VG18A5HW+924GGC
VG18A5JU	4	117 / 74	50	VG18A5JU+924AGA	VG18A5JU+924GGA	VG18A5JU+924AGC	VG18A5JU+924GGC
VG18A5JV		176 / 88		VG18A5JV+924AGA	VG18A5JV+924GGA	VG18A5JV+924AGC	VG18A5JV+924GGC

VG1000 Series Flanged Ball Valves (Continued)

Flanged Stainless Steel Trim Ball Valves with Spring Return Electric Actuators without Switches

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			AC 120 V
				Floating	DC 0 to 10 V Proportional	On/Off	On/Off
				M9220-AGA-3	M9220-GGA-3	M9220-BGA--3	M9220-BAA-3
Two-Way –Spring Return– Valve Open (Normally Open) – without Switches							
VG12A5GS	2-1/2	47	100	VG12A5GS+92NAGA	VG12A5GS+92NGGA	VG12A5GS+92NBGA	VG12A5GS+92NBAA
VG12A5GT		74		VG12A5GT+92NAGA	VG12A5GT+92NGGA	VG12A5GT+92NBGA	VG12A5GT+92NBAA
VG12A5GU		117		VG12A5GU+92NAGA	VG12A5GU+92NGGA	VG12A5GU+92NBGA	VG12A5GU+92NBAA
VG12A5HT	3	74	100	VG12A5HT+92NAGA	VG12A5HT+92NGGA	VG12A5HT+92NBGA	VG12A5HT+92NBAA
VG12A5HU		117		VG12A5HU+92NAGA	VG12A5HU+92NGGA	VG12A5HU+92NBGA	VG12A5HU+92NBAA
VG12A5HV		176		VG12A5HV+92NAGA	VG12A5HV+92NGGA	VG12A5HV+92NBGA	VG12A5HV+92NBAA
VG12A5HW		211		VG12A5HW+92NAGA	VG12A5HW+92NGGA	VG12A5HW+92NBGA	VG12A5HW+92NBAA
VG12A5JU	4	117	100	VG12A5JU+92NAGA	VG12A5JU+92NGGA	VG12A5JU+92NBGA	VG12A5JU+92NBAA
VG12A5JV		176		VG12A5JV+92NAGA	VG12A5JV+92NGGA	VG12A5JV+92NBGA	VG12A5JV+92NBAA
Two-Way –Spring Return – Valve Closed (Normally Closed) – without Switches							
VG12A5GS	2-1/2	47	100	VG12A5GS+94NAGA	VG12A5GS+94NGGA	VG12A5GS+94NBGA	VG12A5GS+94NBAA
VG12A5GT		74		VG12A5GT+94NAGA	VG12A5GT+94NGGA	VG12A5GT+94NBGA	VG12A5GT+94NBAA
VG12A5GU		117		VG12A5GU+94NAGA	VG12A5GU+94NGGA	VG12A5GU+94NBGA	VG12A5GU+94NBAA
VG12A5HT	3	74	100	VG12A5HT+94NAGA	VG12A5HT+94NGGA	VG12A5HT+94NBGA	VG12A5HT+94NBAA
VG12A5HU		117		VG12A5HU+94NAGA	VG12A5HU+94NGGA	VG12A5HU+94NBGA	VG12A5HU+94NBAA
VG12A5HV		176		VG12A5HV+94NAGA	VG12A5HV+94NGGA	VG12A5HV+94NBGA	VG12A5HV+94NBAA
VG12A5HW		211		VG12A5HW+94NAGA	VG12A5HW+94NGGA	VG12A5HW+94NBGA	VG12A5HW+94NBAA
VG12A5JU	4	117	100	VG12A5JU+94NAGA	VG12A5JU+94NGGA	VG12A5JU+94NBGA	VG12A5JU+94NBAA
VG12A5JV		176		VG12A5JV+94NAGA	VG12A5JV+94NGGA	VG12A5JV+94NBGA	VG12A5JV+94NBAA
Three-Way – Spring Return Counterclockwise – Port A (Coil) Open to Port AB (Common) – without Switches							
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+92NAGA	VG18A5GS+92NGGA	VG18A5GS+92NBGA	VG18A5GS+92NBAA
VG18A5GT		74 / 47		VG18A5GT+92NAGA	VG18A5GT+92NGGA	VG18A5GT+92NBGA	VG18A5GT+92NBAA
VG18A5GU		117 / 74		VG18A5GU+92NAGA	VG18A5GU+92NGGA	VG18A5GU+92NBGA	VG18A5GU+92NBAA
VG18A5HT	3	74 / 47	50	VG18A5HT+92NAGA	VG18A5HT+92NGGA	VG18A5HT+92NBGA	VG18A5HT+92NBAA
VG18A5HU		117 / 74		VG18A5HU+92NAGA	VG18A5HU+92NGGA	VG18A5HU+92NBGA	VG18A5HU+92NBAA
VG18A5HV		176 / 88		VG18A5HV+92NAGA	VG18A5HV+92NGGA	VG18A5HV+92NBGA	VG18A5HV+92NBAA
VG18A5HW		211 / 105		VG18A5HW+92NAGA	VG18A5HW+92NGGA	VG18A5HW+92NBGA	VG18A5HW+92NBAA
VG18A5JU	4	117 / 74	50	VG18A5JU+92NAGA	VG18A5JU+92NGGA	VG18A5JU+92NBGA	VG18A5JU+92NBAA
VG18A5JV		176 / 88		VG18A5JV+92NAGA	VG18A5JV+92NGGA	VG18A5JV+92NBGA	VG18A5JV+92NBAA
Three-Way – Spring Return Clockwise – Port B (Bypass) Open to Port AB (Common) – without Switches							
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+94NAGA	VG18A5GS+94NGGA	VG18A5GS+94NBGA	VG18A5GS+94NBAA
VG18A5GT		74 / 47		VG18A5GT+94NAGA	VG18A5GT+94NGGA	VG18A5GT+94NBGA	VG18A5GT+94NBAA
VG18A5GU		117 / 74		VG18A5GU+94NAGA	VG18A5GU+94NGGA	VG18A5GU+94NBGA	VG18A5GU+94NBAA
VG18A5HT	3	74 / 47	50	VG18A5HT+94NAGA	VG18A5HT+94NGGA	VG18A5HT+94NBGA	VG18A5HT+94NBAA
VG18A5HU		117 / 74		VG18A5HU+94NAGA	VG18A5HU+94NGGA	VG18A5HU+94NBGA	VG18A5HU+94NBAA
VG18A5HV		176 / 88		VG18A5HV+94NAGA	VG18A5HV+94NGGA	VG18A5HV+94NBGA	VG18A5HV+94NBAA
VG18A5HW		211 / 105		VG18A5HW+94NAGA	VG18A5HW+94NGGA	VG18A5HW+94NBGA	VG18A5HW+94NBAA
VG18A5JU	4	117 / 74	50	VG18A5JU+94NAGA	VG18A5JU+94NGGA	VG18A5JU+94NBGA	VG18A5JU+94NBAA
VG18A5JV		176 / 88		VG18A5JV+94NAGA	VG18A5JV+94NGGA	VG18A5JV+94NBGA	VG18A5JV+94NBAA

VG1000 Series Flanged Ball Valves (Continued)

Flanged Stainless Steel Trim Ball Valves with Spring Return Electric Actuators with Two Switches

Valve	Size, in.	Cv	Closeoff PSIG	AC 24 V			AC 120 V
				Floating	0 to 10 VDC Proportional	On/Off	On/Off
				M9220-AGC-3	M9220-GGC-3	M9220-BGC-3	M9220-BAC-3
Two-Way –Spring Return – Valve Open (Normally Open) – with Two Auxiliary Switches							
VG12A5GS	2-1/2	47	100	VG12A5GS+92NAGC	VG12A5GS+92NGGC	VG12A5GS+92NBGC	VG12A5GS+92NBAC
VG12A5GT		74		VG12A5GT+92NAGC	VG12A5GT+92NGGC	VG12A5GT+92NBGC	VG12A5GT+92NBAC
VG12A5GU		117		VG12A5GU+92NAGC	VG12A5GU+92NGGC	VG12A5GU+92NBGC	VG12A5GU+92NBAC
VG12A5HT	3	74	100	VG12A5HT+92NAGC	VG12A5HT+92NGGC	VG12A5HT+92NBGC	VG12A5HT+92NBAC
VG12A5HU		117		VG12A5HU+92NAGC	VG12A5HU+92NGGC	VG12A5HU+92NBGC	VG12A5HU+92NBAC
VG12A5HV		176		VG12A5HV+92NAGC	VG12A5HV+92NGGC	VG12A5HV+92NBGC	VG12A5HV+92NBAC
VG12A5HW	4	211	100	VG12A5HW+92NAGC	VG12A5HW+92NGGC	VG12A5HW+92NBGC	VG12A5HW+92NBAC
VG12A5JU		117		VG12A5JU+92NAGC	VG12A5JU+92NGGC	VG12A5JU+92NBGC	VG12A5JU+92NBAC
VG12A5JV		176		VG12A5JV+92NAGC	VG12A5JV+92NGGC	VG12A5JV+92NBGC	VG12A5JV+92NBAC
Two-Way –Spring Return – Valve Closed (Normally Closed) – with Two Auxiliary Switches							
VG12A5GS	2-1/2	47	100	VG12A5GS+94NAGC	VG12A5GS+94NGGC	VG12A5GS+94NBGC	VG12A5GS+94NBAC
VG12A5GT		74		VG12A5GT+94NAGC	VG12A5GT+94NGGC	VG12A5GT+94NBGC	VG12A5GT+94NBAC
VG12A5GU		117		VG12A5GU+94NAGC	VG12A5GU+94NGGC	VG12A5GU+94NBGC	VG12A5GU+94NBAC
VG12A5HT	3	74	100	VG12A5HT+94NAGC	VG12A5HT+94NGGC	VG12A5HT+94NBGC	VG12A5HT+94NBAC
VG12A5HU		117		VG12A5HU+94NAGC	VG12A5HU+94NGGC	VG12A5HU+94NBGC	VG12A5HU+94NBAC
VG12A5HV		176		VG12A5HV+94NAGC	VG12A5HV+94NGGC	VG12A5HV+94NBGC	VG12A5HV+94NBAC
VG12A5HW	4	211	100	VG12A5HW+94NAGC	VG12A5HW+94NGGC	VG12A5HW+94NBGC	VG12A5HW+94NBAC
VG12A5JU		117		VG12A5JU+94NAGC	VG12A5JU+94NGGC	VG12A5JU+94NBGC	VG12A5JU+94NBAC
VG12A5JV		176		VG12A5JV+94NAGC	VG12A5JV+94NGGC	VG12A5JV+94NBGC	VG12A5JV+94NBAC
Three-Way – Spring Return Counterclockwise – Port A (Coil) Open to Port AB (Common) – with Two Auxiliary Switches							
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+92NAGC	VG18A5GS+92NGGC	VG18A5GS+92NBGC	VG18A5GS+92NBAC
VG18A5GT		74 / 47		VG18A5GT+92NAGC	VG18A5GT+92NGGC	VG18A5GT+92NBGC	VG18A5GT+92NBAC
VG18A5GU		117 / 74		VG18A5GU+92NAGC	VG18A5GU+92NGGC	VG18A5GU+92NBGC	VG18A5GU+92NBAC
VG18A5HT	3	74 / 47	50	VG18A5HT+92NAGC	VG18A5HT+92NGGC	VG18A5HT+92NBGC	VG18A5HT+92NBAC
VG18A5HU		117 / 74		VG18A5HU+92NAGC	VG18A5HU+92NGGC	VG18A5HU+92NBGC	VG18A5HU+92NBAC
VG18A5HV		176 / 88		VG18A5HV+92NAGC	VG18A5HV+92NGGC	VG18A5HV+92NBGC	VG18A5HV+92NBAC
VG18A5HW	4	211 / 105	50	VG18A5HW+92NAGC	VG18A5HW+92NGGC	VG18A5HW+92NBGC	VG18A5HW+92NBAC
VG18A5JU		117 / 74		VG18A5JU+92NAGC	VG18A5JU+92NGGC	VG18A5JU+92NBGC	VG18A5JU+92NBAC
VG18A5JV		176 / 88		VG18A5JV+92NAGC	VG18A5JV+92NGGC	VG18A5JV+92NBGC	VG18A5JV+92NBAC
Three-Way – Spring Return Clockwise – Port B (Bypass) Open to Port AB (Common) – with Two Auxiliary Switches							
VG18A5GS	2-1/2	47 / 29	50	VG18A5GS+94NAGC	VG18A5GS+94NGGC	VG18A5GS+94NBGC	VG18A5GS+94NBAC
VG18A5GT		74 / 47		VG18A5GT+94NAGC	VG18A5GT+94NGGC	VG18A5GT+94NBGC	VG18A5GT+94NBAC
VG18A5GU		117 / 74		VG18A5GU+94NAGC	VG18A5GU+94NGGC	VG18A5GU+94NBGC	VG18A5GU+94NBAC
VG18A5HT	3	74 / 47	50	VG18A5HT+94NAGC	VG18A5HT+94NGGC	VG18A5HT+94NBGC	VG18A5HT+94NBAC
VG18A5HU		117 / 74		VG18A5HU+94NAGC	VG18A5HU+94NGGC	VG18A5HU+94NBGC	VG18A5HU+94NBAC
VG18A5HV		176 / 88		VG18A5HV+94NAGC	VG18A5HV+94NGGC	VG18A5HV+94NBGC	VG18A5HV+94NBAC
VG18A5HW	4	211 / 105	50	VG18A5HW+94NAGC	VG18A5HW+94NGGC	VG18A5HW+94NBGC	VG18A5HW+94NBAC
VG18A5JU		117 / 74		VG18A5JU+94NAGC	VG18A5JU+94NGGC	VG18A5JU+94NBGC	VG18A5JU+94NBAC
VG18A5JV		176 / 88		VG18A5JV+94NAGC	VG18A5JV+94NGGC	VG18A5JV+94NBGC	VG18A5JV+94NBAC

VG1000 Series Flanged Ball Valves (Continued)

Technical Specifications

VG1000 Series Flanged Ball Valves

Service¹		Hot Water, Chilled Water, 50/50 Glycol Solutions, and 25 psig (172 kPa) Saturated Steam for HVAC Systems
Valve Fluid Temperature Limits		0 to 284°F (-18 to 140°C)
Valve Body Pressure/ Temperature Rating	Water	ASME Class 150 250 psi at -20 to 100°F (29 to 38°C) 235 psi at: 200°F (93°C) 218 psi at: 284°F (140°C)
	Steam	25 psig (172 kPa) Saturated Steam for HVAC Systems
Maximum Closeoff Pressure	Two-Way	100 psi (689 kPa)
	Three-Way	50 psi (345 kPa)
Maximum Recommended Operating Pressure Drop		30 psi (207 kPa) for quiet service
Flow Characteristics	Two-Way	Equal Percentage
	Three-Way	Equal Percentage Flow Characteristics of In-line Port or Linear Percentage Flow Characteristics of Angle Port
Rangeability²		Greater than 500:1
Leakage	Two- or Three-Way	0.01% of Maximum Flow, Control Port, ANSI/FCI 70-2, Class 4
	Three-Way	1% of Maximum Flow, Bypass Port
End Connections		ASME Class 150 Flange
Minimum Ambient Operating Temperature	-4°F (-20°C)	M9124 Series Non-Spring Return Actuators
	-40°F (-40°C)	M9220 Series Spring Return Actuators
Maximum Ambient Operating Temperature³	122°F (50°C)	M9124 Series Non-Spring Return Actuators
	131°F (55°C)	M9220 Series Spring Return Actuators
Materials	Body	Brass
	Flanges	Ductile Iron
	Ball	300 Series Stainless Steel
	Stem	300 Series Stainless Steel
	Seats	Graphite Reinforced PTFE with EPDM O-Ring Backing
	Stem Seals	EPDM O-Rings
	Flow Control Disk	Amodel AS-1145HS Polyphthalamide Resin

1. Refer to VDI 2035 Standard for proper water treatment.

2. Rangeability is defined as the ratio of maximum controllable flow to minimum controllable flow.

3. In steam applications, install the valve with the stem horizontal to the piping and wrap the valve and piping with insulation.